

ADAM-4080/4080D


ADAM-4117

ADAM-4118

Counter/Frequency Module

8-channel Analog Input Module

8-channel Thermocouple Input Module

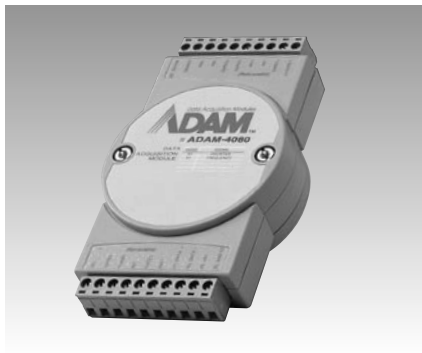

ADAM-4080/4080D



ADAM-4117



ADAM-4118

Specifications

General

- **LED Indicators** 5-digit readout, CH 0 or CH 1 (programmable) (ADAM-4080D only)
- **Power Consumption** 2.0 W @ 24 V_{DC}
- **Power Input** Unregulated 10-30 V_{DC}

Counter Input

- **Alarm** Alarm comparator on each counter
- **Channels** Two independent 32-bit counters
- **Input Frequency** 50 kHz max. (non-isolation)
- **Input Pulse Width** >10 μs.
- **Input Mode** Isolated or non-isolated
- **Isolation Input Level** Logic level 0: +1 V max. Logic level 1: 3.5-30 V
- **Isolation Voltage** 2500 V_{RMS}
- **Non-isolated Input Level** Programmable threshold:
Logic level 0: 0 to +5 V (default = 0.8 V)
Logic level 1: 0 to +5 V (default = 2.4 V)
- **Maximum Count** 4,294,967,295 (32 bits)
- **Preset Type** Absolute or relative
- **Programmable Digital Noise Filter** 2 ~ 65 μs

Frequency Measurement

- **Range** 5 Hz ~ 50 kHz
- **Programmable Built-in Gate Time** 1.0/0.1 sec.

Digital Output

- **Channels** 2
- **Open Collector** 30 V, 30 mA max. load
- **Power Dissipation** 300 mW for each channel

Specifications

General

- **Power Consumption** 1.2 W @ 24 V_{DC}
- **Power Input** Unregulated 10-48 V_{DC}

Analog Input

- **Accuracy** Voltage mode : ±0.1% or better
Current mode : ±0.2% or better
- **ASCII commands and Modbus protocol**
- **Built-in TVS/ESD Protection**
- **Channels** 8 x differential and independent configuration channels 92 dB min.
- **CMR @ 50/60 Hz**
- **Fault and Overvoltage** With stands overvoltage protection up to ±60 V 200 V_{DC}
- **High Common Mode** Voltage: 20 MΩ
- **Input Impedance** Current: 120 Ω
- **Input Type** mV, V (supports uni-polar and bipolar), mA
- **Input Range** 0-150mV, 0-500mV, 0-1V, 0-5V, 0-10V, 0-15V, ±150 mV, ±500 mV, ±1V, ±5 V, ±10 V, ±15V, ±20 mA, 4-20mA 3000 V_{DC}
- **Isolation Protection** 16 bits
- **Resolution** 10/100 samples/sec (selected by Utility)
- **Sampling Rate** ±25 ppm/°C
- **Span Drift** 2
- **Watchdog Timers** ±6μV/°C
- **Zero Drift**

Common Specifications

General

- **Dimensions** 70 x 122 x 30 mm
- **Connector** 2 x Plug-in terminal blocks (#14 ~ 22 AWG)
- **Enclosure** ABS+PC
- **Mounting** DIN 35 rail, stack, wall
- **Watchdog Timer** 1.6 sec. (system)

Environment

- **Humidity** 5 ~ 95% RH
- **Operating Temperature** 4080/4080D: -10-70°C (-14-158° F)
4117/4118: -40-85°C(-40- 185° F)
- **Storage Temperature** 4080/4080D: -25-85°C(-13-185° F)
4117/4118: -40- 85°C(-40- 185° F)

Specifications

Analog Input

- **Analog Input Channel** 8 differential & independent thermocouple configurations
Voltage: 20 MΩ
Current: 120 Ω
- **Input Impedance**
- **Input Range** Thermocouple
J 0 ~ 760 °C
K 0 ~ 1370 °C
T -100 ~ 400 °C
E 0 ~ 1000 °C
R 500 ~ 1750 °C
S 500 ~ 1750 °C
B 500 ~ 1800 °C
- **Voltage mode** ±15 mV, ±50 mV, ±100 mV, ±500 mV, ±1 V, ±2.5 V
- **Current mode** ±20 mA, +4-20 mA
- **Sampling Rate** 10/100 samples/sec(selected by Utility) 3,000 V_{DC}
- **Isolation Protection**
- **Power**
- **Power Consumption** 0.5 W @ 24 V_{DC}
- **Communication**
- **Network** RS-485 (2-wire)
- **Speed** 1.2 ~ 115.2 kbps
- **Distance** 1.2 km (4000 ft)
- **Data Format** Advantech protocol: 1 start bit, 8 data bits, 1 stop bit, none parity
- **Modbus Protocol** 1 start bit, 8 data bits, 1 or 2 stop bit, parity check (none, even,odd)
- **Modbus/RTU Protocol Support** Yes
- **Watchdog Timers** System, Communication

Ordering Information

- **ADAM-4080** Counter/Frequency module
- **ADAM-4080D** Counter/Frequency module with LED Display
- **ADAM-4117** 8-channel Analog Input Module
- **ADAM-4118** 8-channel Thermocouple Input Module