



QCP-2000, Cosine PAR Sensors Measuring Downwelling Irradiance over PAR (400-700nm)

Cosine PAR sensors in our new QCP-2000 series, feature a newly-designed pressure housing and an improved cosine collector design. The standard sensor is rated to 2,000 m. However, by addition of a high-pressure connector, these instruments may be deployed to depths of 10,000 m. As with our other “Q-Series” sensors, the QCP utilizes a filtered silicon photodetector that has a flat quantum response over PAR (Photosynthetically Active Radiation; 400–700 nm).

The most noteworthy improvement in this new series is the capability of direct connection to a PC or laptop computer. Our **QCP-2100** sensors contain imbedded calibration information, and data are transmitted directly into the computer. This new, low-power circuitry requires no batteries, relying instead on power from the host computer’s serial comport. Using the provided Windows-based data-acquisition software, these **QCP-2100** may operate at distances of 200 m from the host PC or laptop computer. Our new **QCP-2150** sensor outputs an ASCII data stream, upon power-up.

QCP-2200 linear-analog output models, feature high-quality, low-drift, electrometer-grade amplifiers and are compatible with most commercially available 16-bit data loggers.

QCP-2300, a logarithmic-analog output version is also available. This sensor was designed specifically for integration with 12-bit CTD systems and data loggers requiring a limited-range of signal input.



The QCP sensors are rugged and compact.

- *Compact, rugged, and low-cost*
- *1.1 cm diameter acrylic cosine collector*
- *Designed to measure downwelling PAR (400-700 nm) irradiance to depths of 10,000 m*
- *QCP-2100 includes operating software allowing direct connection to a Windows PC or laptop computer*

Key Features

Specifications

Optical Features

Cosine Irradiance Collector: 1.1 cm diameter solid acrylic collector / diffuser.

Photodetector: Blue-enhanced, high-stability silicon detector with dichroic blocking filters.

PAR Spectral Response: Equal (better than $\pm 10\%$) quantum response from 400–700 nm with response sharply attenuated above 700 nm and below 400 nm. Spectral response-induced errors will cause less than 5% errors in naturally occurring light fields.

Cosine Directional Response: ± 0 to 65° , $\pm 7\%$, ± 65 to 86° , $\pm 10\%$

Sensitivity: When purchased alone, the sensor is calibrated in quanta/(cm²·sec)/volt. Nominal sensitivity is 1 volt = 1×10^{17} quanta/(cm²·sec) (slightly less than full sunlight). Noise level is typically less than 1 millivolt, temperature coefficient of the dark signal is less than 10 microvolts/°C, and response temperature coefficient is less than 0.15%/°C.

Electronic Features

Measured Signals: PAR Dynamic Range: 1.4×10^5 $\mu\text{E}/(\text{cm}^2 \cdot \text{sec})$ to $0.5 \mu\text{E}/(\text{cm}^2 \cdot \text{sec})$

Mechanical Features

Dimensions:

Diameter: 5 cm

Height: 19.0 cm

Weight: 1.1 kg

Housing Materials:

Collector:

Machined Acrylic

Housing:

Hard anodized aluminum

Environmental

Temperature Range: -2°C to 35°C

Calibration

The QCP-2000 sensors are calibrated using a National Institute of Standards and Technology- (NIST) traceable 1000-watt type FEL Standard of Spectral Irradiance using procedures recommended by NIST. Annual recalibration is strongly recommended.

Software

LOGGER-2100 data-acquisition software is included with each QCP-2100 sensor. LOGGER-2100 is compatible with most Microsoft Windows® platforms, including Windows 7, VISTA, and XP. Data are in a digital format and transferred to the PC or laptop at 9600 baud. The user may configure this software to display in Quanta or MicroEinsteins.

Fully calibrated with lamps traceable to NIST, each digital sensor contains imbedded calibration factors.


The screenshot shows a software window titled "Probe Details" with a blue header. It is divided into two sections: "Factory Set Factors" and "Field Adjustable Factors".

Factory Set Factors:

- Serial Number: 2100
- Model: QSL
- Calibration Date: 9 / 00
- Immersion Coefficient: 1
- Sensitivity Factor: 6.86E-18
- Buttons: "Unlock Protected Info"

Field Adjustable Factors:

- Measurement Units: $\mu\text{Einstein}/\text{cm}^2/\text{sec}$
- Tag Number: 11
- Offset value: 8.605004E-
- Buttons: "Save All", "AutoZero", "Exit"
- Checkbox: Use Immersion Coefficient

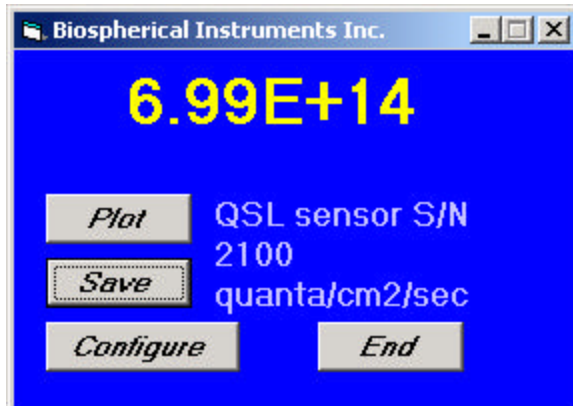

BSI's new operating software, LOGGER-2100 logs and displays calibrates data in either Quanta or $\mu\text{Einstein}$ s.



Biospherical Instruments Inc.

Biospherical Instruments Inc.
5340 Riley Street
San Diego, CA 92110-2621 USA
Phone: (619) 686-1888
Fax: (619) 686-1887
E-mail: sales@biospherical.com
URL: www.biospherical.com

Copyright © Biospherical Instruments Inc.,
2011

U.S. Patent No. 4,178,101

*Specifications subject to change without notice