


The New Model 61202 Barometric Pressure Sensor offers unparalleled performance and flexibility for atmospheric pressure measurement.

The barometer is available in two configurations to satisfy a variety of applications; Model 61202V offers 0-5 VDC output, 61202L offers a 4-20 mA current output. Both models offer serial output in addition to the analog signal.

The barometer is housed in a weatherproof molded case. Cable connections are inside. A U-bolt mounting is supplied for easy attachment to towers and masts.

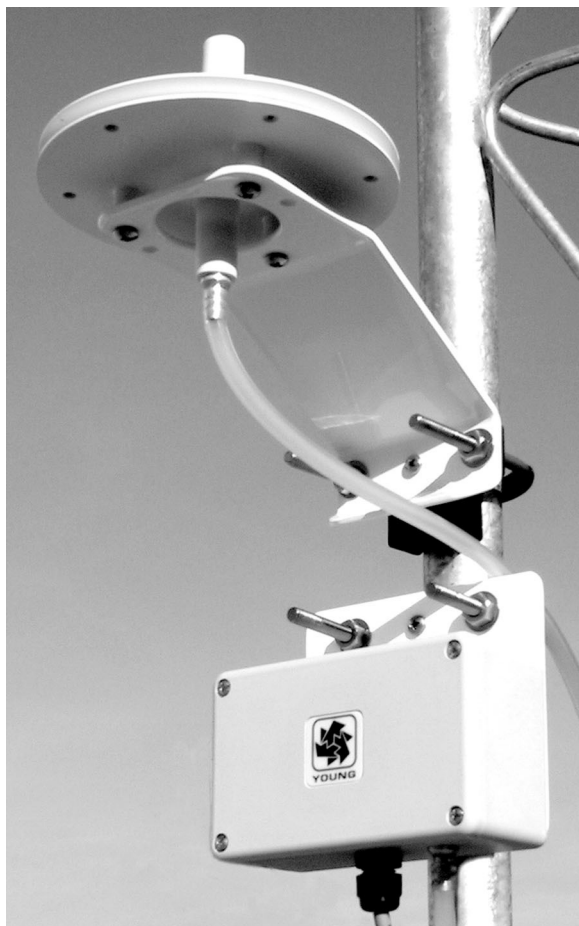

Barometer and Pressure Port

For outdoor installation, use of Model 61002 Pressure Port is recommended. The Pressure Port minimizes dynamic pressure errors due to wind.

Specifications

Operating Range:
600-1100 hPa (17.7 – 32.5 inHg)

Output Signal:
0-5 VDC (61202V)
4-20 mA (61202L)
Serial RS232/RS485 (all models)

Operating Temperature:
-50 to +60°C

Accuracy:
±0.3 hPa (.01 inHg) @ 20°C
±0.5 hPa (.015 inHg) over temperature range

Power Requirement:
10 to 30 VDC, 10 mA

Dimensions:
118mm (4.6 in) W x 73mm (2.8 in) H x 54 mm
(2.1 in) D excluding mounting

Weight:
0.6 kg (1.3 lb)

Other:
Sea-level offset

Ordering Information

MODEL

BAROMETRIC PRESSURE SENSOR, 0-5 VDC	61202V
BAROMETRIC PRESSURE SENSOR, 4-20 mA	61202L
PRESSURE PORT WITH OFFSET BRACKET	61002

CE Complies with applicable CE Directives

Copyright © 2004 R.M. Young Company. Specifications subject to change without notice. Printed in USA. 07/04



R. M. YOUNG COMPANY
2801 Aero Park Drive
Traverse City, Michigan 49686 USA
TEL: (231) 946-3980 FAX: (231) 946-4772
E-mail: met.sales@youngusa.com
Web Site: www.youngusa.com